




Shenzhen Coofan Electronics Co., Ltd.

Xingheshiji Building A, No. 3069 Caitian Road, Gangxia Community, Futian Subdistrict, Futian District, Shenzhen, China


Picture



PQ curve

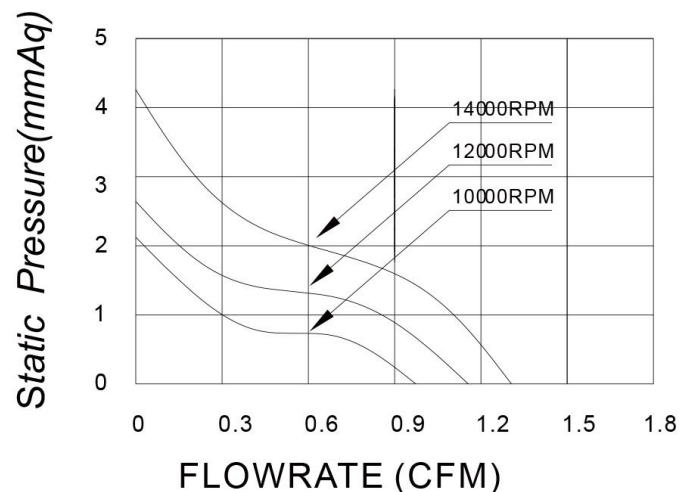

Drawing

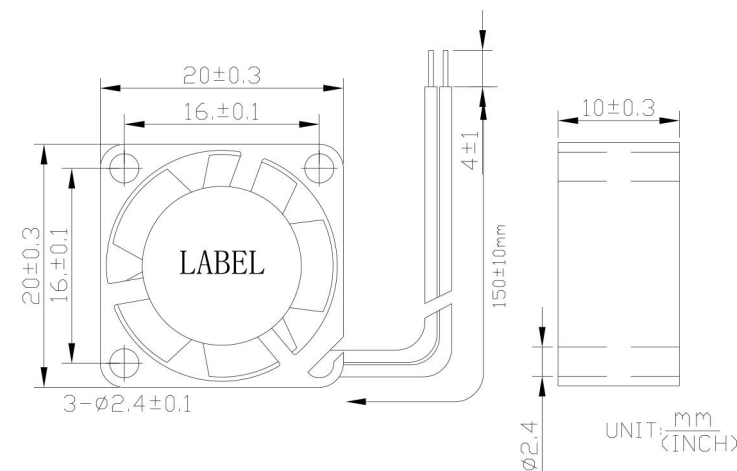

Model	Bearing Type		Rated Voltage	Current Amp	Speed	Air flow	Static Pressure	Noise Level	Weight
Part No.	S	B	V	A	RPM	CFM	mmH2O	dBA	G
DC2010L05X	✓	✓	5	0.06	10000	1.05	2.16	18.8	4.7
DC2010M05X	✓	✓	5	0.08	12000	1.14	2.65	21.3	4.7
DC2010H05X	✓	✓	5	0.13	14000	1.35	4.30	24.2	4.7
DC2010L12X	✓	✓	12	0.03	10000	1.05	2.16	18.8	4.7
DC2010M12X	✓	✓	12	0.05	12000	1.14	2.65	21.3	4.7
DC2010H12X	✓	✓	12	0.08	14000	1.35	4.30	24.2	4.7

"X" means sleeve bearing or ball bearing. All models can be customized to meet customer needs.